


The way to remove the silicon.

Feb.1, 2011


- 1 Please cut the silicone carefully along the edge of the connector.
Please be careful not to cut the wires, the PWB and other components.
- - - : Cut line

[Connector : Top view]

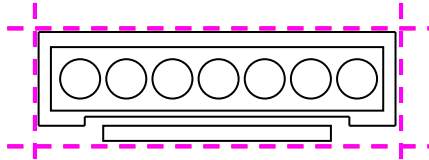

- 2 Please remove the silicone on the edge of the plug by using small screwdriver (-).
- - - : Removal line
- 3 Please remove the silicone in the gap of the plug by using small screwdriver (-).
- - - : Removal line

[Connector : Side view]

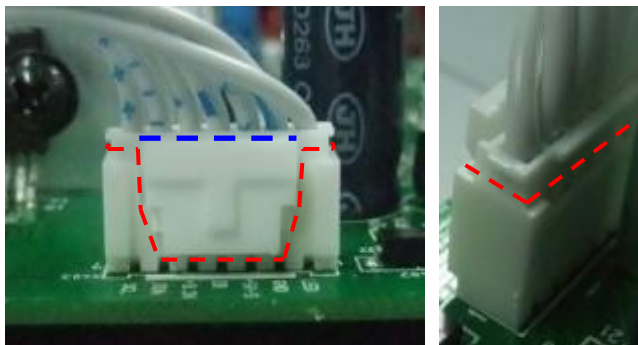

[Connector : Top view]

