
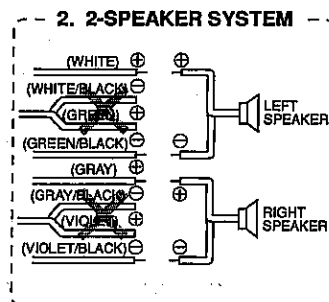
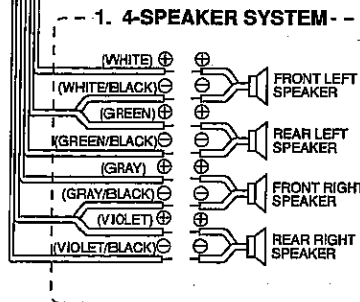


## Mounting Bracket for FXR-31

English

### ELECTRICAL CONNECTIONS

- Connect the red wire (+12V MAIN POWER SUPPLY) to a terminal that receives power while the ignition switch is ON or in the ACCESARY position.
- Connect the blue wire (POWER ANT) to a external amplifier or power antenna turn on wire.
- Connect the black wire to the car chassis.

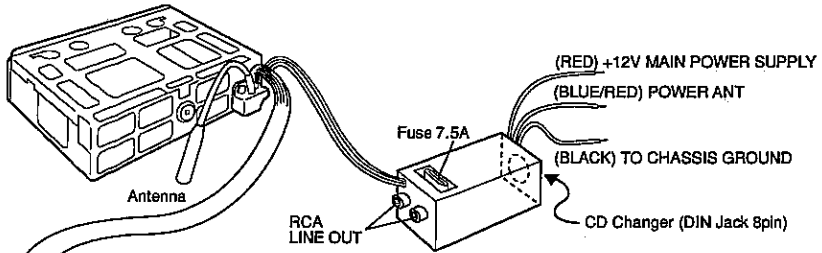

#### NOTE:

- The FADER control has no effect on the output when using a two speaker installation. Under this condition, set the FADER control to the center position.
- When not using an automatic antenna, cover the end of Blue wire wire with electrical tape, to prevent it from shorting to the unit or the unit or the vehicle chassis.
- When using a two speaker installation, the white/black, green, gray/black and violet wires, which are used for a four speaker installation, are not used. The ends of these wires must be covered with electrical tape, to prevent it from shorting to the unit or vehicle chassis.

### INSTALLATION

1. Insert mounting bracket into DIN-standard cutout 182 x 53 mm in the dashboard or a console. The side marked "UP" should be up. (Fig. 1)
2. Bend the stoppers of the mounting bracket with a screwdriver, and secure the bracket firmly to the dashboard. (Fig. 2)
3. Fix the mounting bracket by using the mounting hardware.

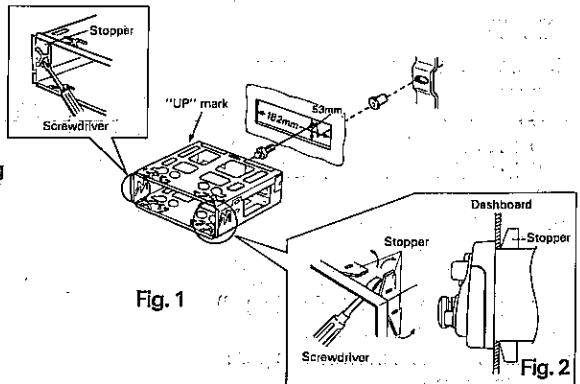


Fig. 1

Fig. 2