

Spare Parts Notice

Subject: AWA LC-32G76 32" LCD TV

There are two versions of this model: - (a) LC-32G76 - (MM/311/RP) & (b) LC-32G76 - (MM/177/RP)
The versions can be identified by the serial number structure and range as shown below.

Serial Number Structure

(a) LC-32G76 - (MM/311/RP)

(b) LC-32G76 - (MM/177/RP)



Product Serial Number Range

- (a) LC-32G76 - (MM/311/RP) :- LC32G76200907100 0001 ~~~~ LC32G76200907100 2000
(b) LC-32G76 - (MM/177/RP) :- LC32G762009022500001 ~~~~ LC32G762009022501638

Part List for LC-32G76 - (MM/311/RP) Version

Part Number	Description	Remarks
C3276G010	LCD Panel Type: - AUO T315HW02 _V0 [MM/311/R Version]	Suites Main Board C/N: PC09128 Authorisation Required Before Replacing
C3276G006	Main Board Type: - C/N: PC09128 [MM/311/R Version]	Suites Panel Type: - AUO T315HW02 _V0
C3276G008	LDVS Cable [MM/311/R Version]	Suites Panel Type: - AUO T315HW02 _V0
C3276G009	Power LED / IR Board [MM/311/R Version]	Suites Main Board C/N: PC09128

Part List for LC-32G76 - (MM/177/RP) Version

Part Number	Description	Remarks
C3276G010A	LCD Panel Type: - AX080F030FB _Hitachi T315HW02 [MM/177/RP Version]	Suites Main Board C/N: PC09029 Authorisation Required Before Replacing
C3276G006A	Main Board Type: - C/N: PC09029 [MM/177/RP Version]	Suites Panel Type: - AX080F030FB _Hitachi T315HW02
C3276G008A	LDVS Cable [MM/177/RP Version]	Suites Panel Type: - AX080F030FB _Hitachi T315HW02
C3276G009A	Power LED / IR Board [MM/177/RP Version]	Suites Main Board C/N: PC09029


Part List for LC-32G76 - (MM/311/RP) & (MM/177/RP) Versions

Part Number	Description	Remarks
C3276G001	Power Cable _ [MM/311/R & MM/177/RP Versions]	Same for both versions
C3276G002	Remote Control _ [MM/311/R & MM/177/RP Versions]	Same for both versions
C3276G003	Speaker _ [MM/311/R & MM/177/RP Versions]	Same for both versions
C3276G004	Power Switch _ [MM/311/R & MM/177/RP Versions]	Same for both versions
C3276G005	Power Supply Board _ [MM/311/R & MM/177/RP Versions]	Same for both versions
C3276G007	Key Board _ [MM/311/R & MM/177/RP Versions]	Same for both versions

Part Item Identification



LCD Panel

LC-32G76 - (MM/311/RP): Panel Type: - AUO T315HW02 _V0

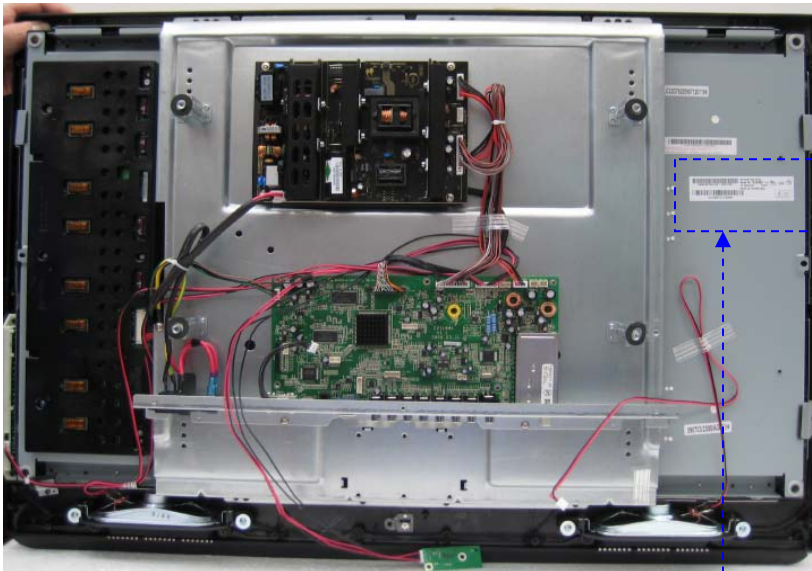

LCD Panel (cont)

LC-32G76 - (MM/177/RP : Panel Type: - AX080F030FB [Hitachi T315HW02 Panel])

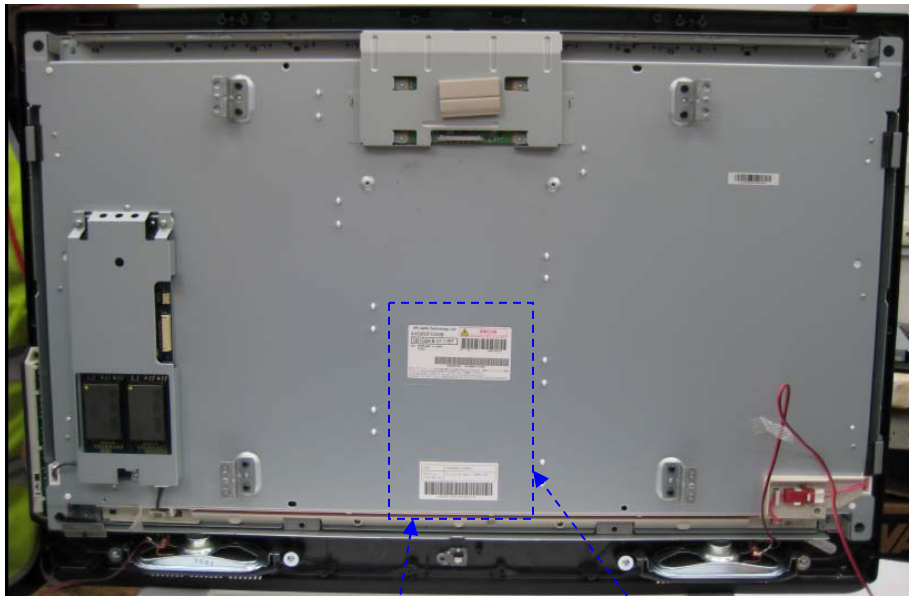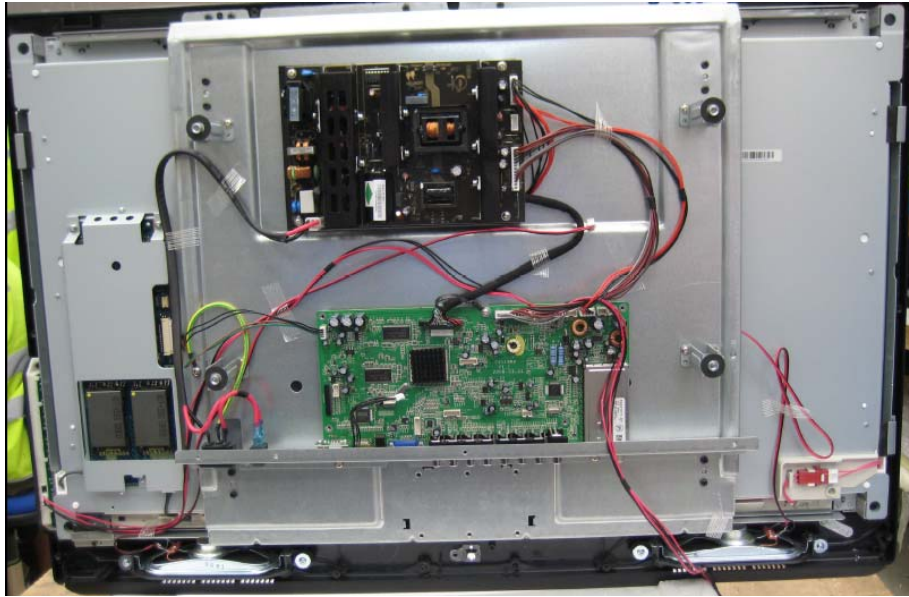

IPS Alpha Technology, Ltd.
AX080F030B
08104H B 011157
REV AG MADE IN JAPAN

高電圧注意
CAUTION HIGH VOLTAGE

R 02 KH8C7A2F67

AX080F030B 08104HB011157AG


本ディスプレイユニット内の蛍光管には水銀が含まれております。液晶ディスプレイの廃棄に当たっては地方自治体の条例または規則に従って廃棄して下さい。
FLUORESCENT LAMP IN COLOR LCD CONTAINS MERCURY.
PLEASE FOLLOW LOCAL ORDINANCES OR REGULATIONS FOR ITS DISPOSAL.

CODE	H0350146R01
Material Information	Diffusing Board >SMMA,PS<


H0350146R018AP2049475

Main Board


LC-32G76 - (MM/311/RP) & (MM/177/RP) [Hardware same for both versions]

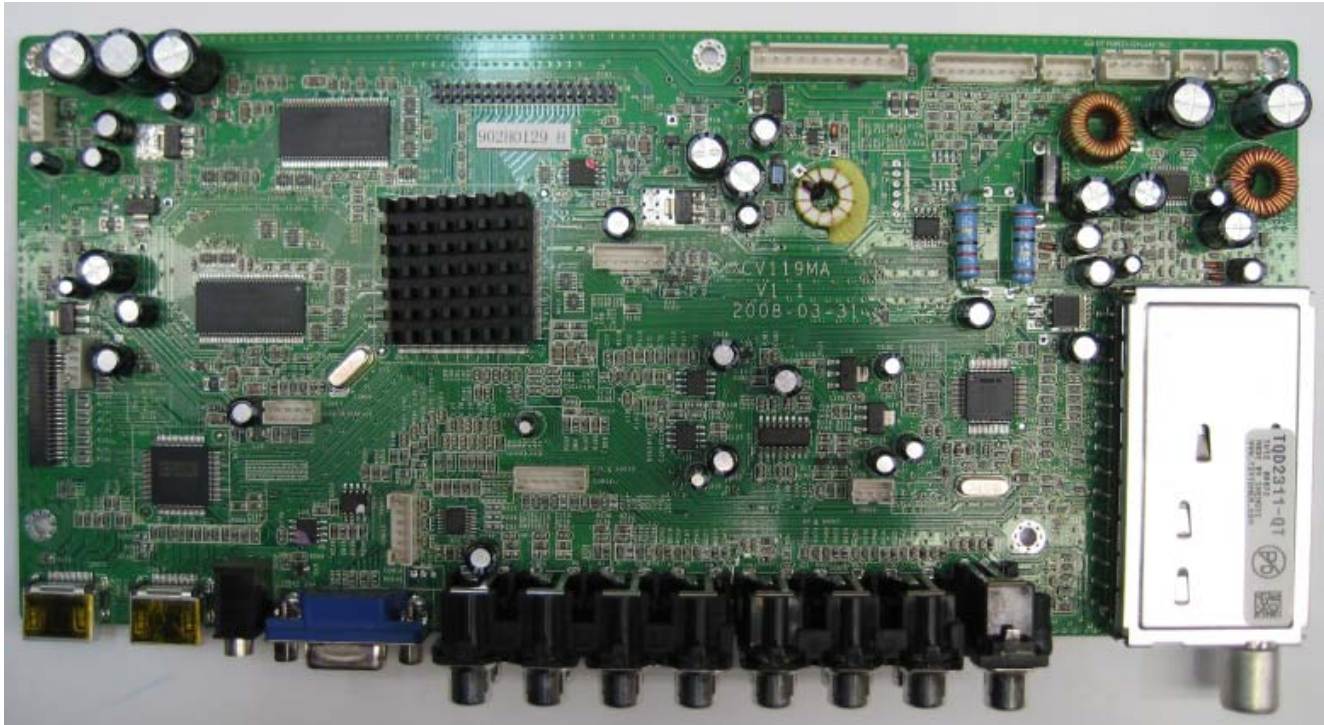

MM/311/RP Suits Panel Type: - AUO T315HW02_V0 [Refer to C/N for Identification]

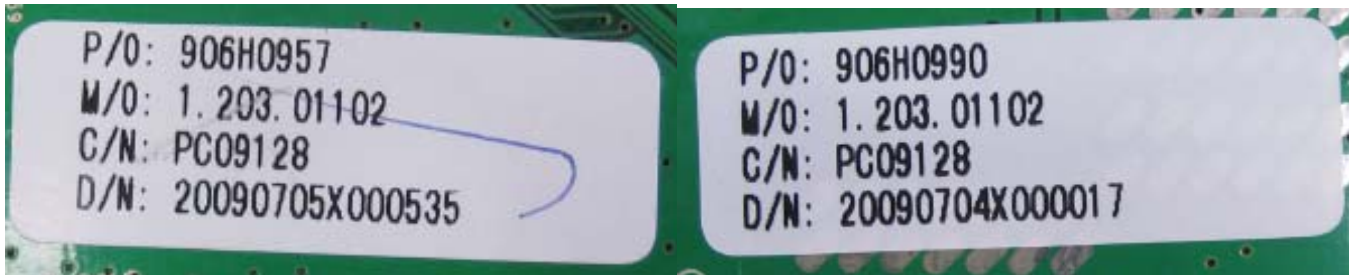

MM/177/RP Suits Panel Type: - AX080F030FB [Hitachi T315HW02 Panel] [Refer to C/N for Identification]

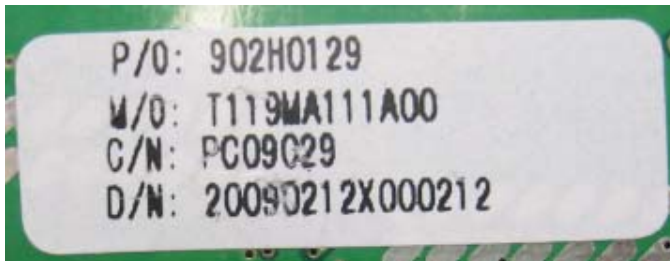


Note: - Label is found on the underside of printed circuit board.

Power LED / IR Board

LC-32G76 - (MM/311/RP)



LC-32G76 (MM/177/RP)

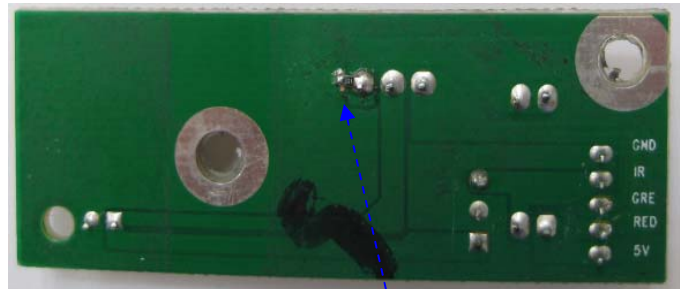

Note: - [Power Indicator = LED1]
RED = STANDBY and BLUE = Operation (Switched On)




LDVS Cables


LC-32G76 - (MM/311/RP) & (MM/177/RP)



LDVS Cables (cont)

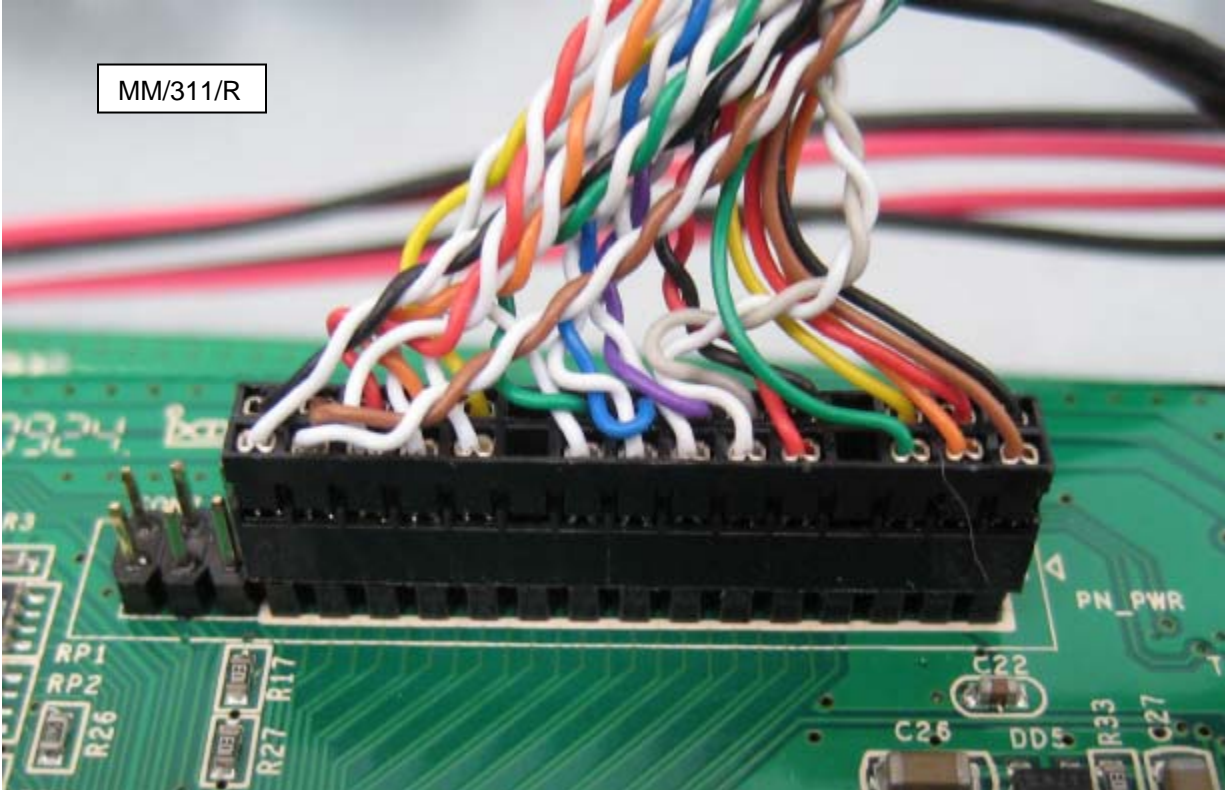

MM/311/R

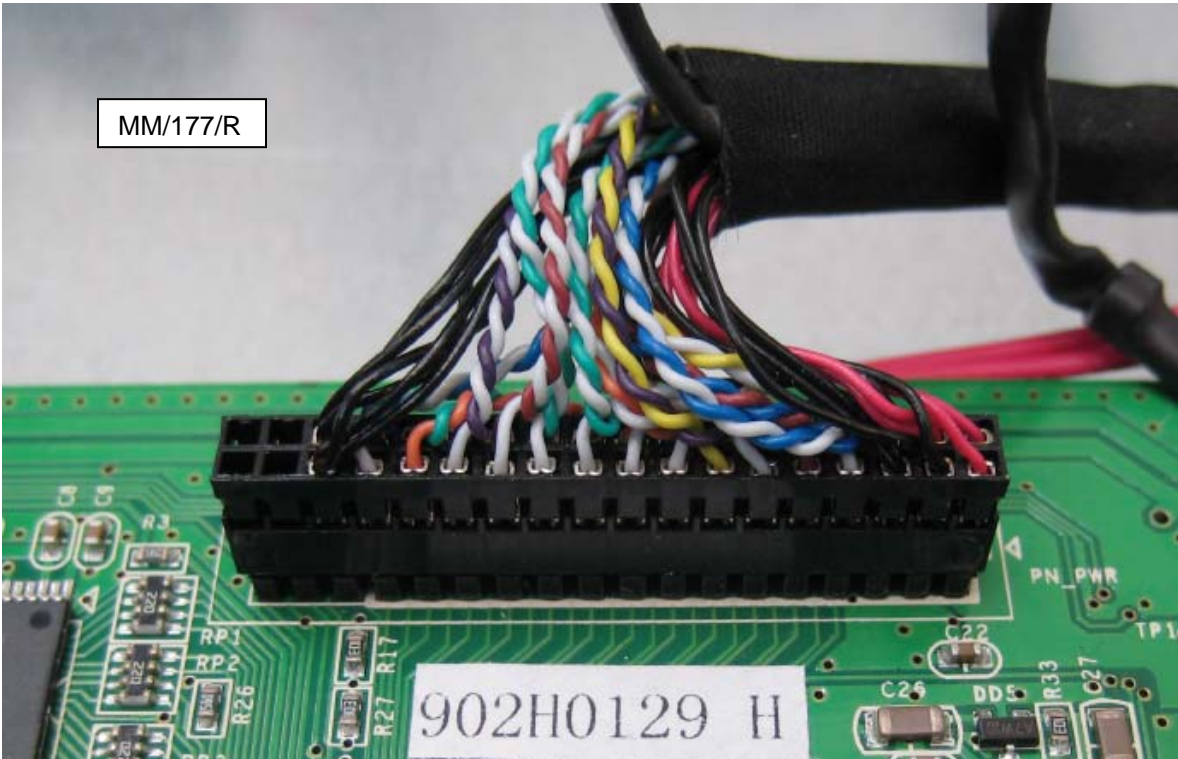

MM/177/R

LDVS Cables (*cont*)

Connection to Digital Matrix Board of the Panel

